

Seated Height Lecterns










Model Number Structure

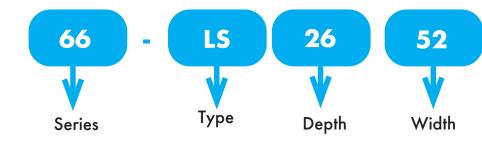

LX Modesty **Panel** See next page for Modesty


combinations

Dimensions

Depth Options: 26" / 30"

Width: 53-3/8"

Height Options: 30" / 32" (ADA Height Compliant)




Includes/Features:


30

Height

- 1" Thermofused Melamine
- Flat PVC Edge Banding
- Removable Locking Modesty Panels in Laminate or Perforated Metal
- Rack Rails
- Flip-up Shelf (optional)

- Wire Management
- Multi-plug Power Strips
- Locking Casters
- Locking Doors
- Ships Assembled





Modesty Panel Options

Laminate Modesty Panel

Perforated Metal Modesty Panel

Color Options

Base Color Options















(227)









Worksurface Color Options



























Metallic Color Options (for Metal Modesty)



POLISHED (PBL)











Modesty Combinations for Perforated Metal Modesty

MC - Metal Modesty Panels & CPU Shelf

MD - Metal Modesty Panels & CPU compartment w/door

ML - Metal modesty; D-Top Left

MM - Metal Modesty Panels

MR - Metal Modesty; D-Top Right

MX - Metal Modesty; No CPU shelf

Modesty Combinations for Laminate Modesty

LC - Laminate Modesty Panels & CPU Shelf

LD - Laminate Modesty Panels & CPU compartment w/door

LL - Laminate modesty; D-Top Left

LM - Laminate Modesty Panels

LR - Laminate Modesty; D-Top Right

LX - Laminate Modesty; No CPU shelf

Also Available with all Visual Display Options



Trolley™ Monitor Lift With the press of a button, the display emerges from its fully recessed compartment beneath the work surface while the patented access door provides a clean, uncluttered work space.



DownviewTM The fully-adjustable arm allows for easy, under desk mounting of any flat panel display with all the benefits of the ergonomically proven Downward Gaze viewing angle.



Articulating Surface Mount Arm

The Articulating Surface Arm provides an adjustable and secure mounting solution for computer monitors



Surface Mount Arm The Surface Mount Arm attaches to the underside of the work surface and provides limited adjustability of the flat panel display.

Options & Accessories

Please Note: All items on this page must be Field installed.

Options for Seated Height Lecterns

2 Space Rack Drawer

Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity

Model Number: 66-2DRAWER



Flip-up shelf

Shipped Separately. Color matches worksurface of desk ordered. Located 3" down from worksurface.

Sizes available for all desks. See pricebook for model



Attaches to rack rails. 35 lb. weight capacity. **Model Number: 66-SSHELF**



2 Space Rack Shelf

Attaches to rack rails. Takes up 2 RU space . 50 lb. weight capacity. **Model Number: 66-2SHELF**



Removable Console

Black laminate box. (Customer to provide cutouts needed). **Model Number: 66-CONSOLE01**



Ventilation Fan

115V fan rated at 57 CFM, 30 dBA, Factory installed in lectern - add (-VF) on lectern model number to be installed. Specify cutout location on lectern Model Number: 66-FAN



Rack Cube

Available from 6 RU - 14 RU. Specify number of Rack Units at the end of model number. Standard Polished Black metal Model Number: 66-RRCUBE



Factory Installed Accessories

Factory Installed NOVA Keyboard



Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen. Model Number: NK

Rectangular Wire Grommet

Rectangular black plastic grommet cover is removable for easy wire management.

Model Number: WG1080



One grounded outlet. 6Ft, 15 Amp cord. UL Listed



Round Power

Model Number: % \$' B



Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through.

Model Number: RWGSC



Center

Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.

Model Number: 11225PP

Pop-up Power/ Data Center



One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. Model Number: 11225PD

Pop-up Power/ **USB** Charging Center

One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. Model Number: 11225PC



Round Flush Power Center Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL Listed



Model Number: 3359PP

Round Flush Power/USB Charging Center

One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed Model Number: 3359PC



